


EMERGENCY TOWING WIRE

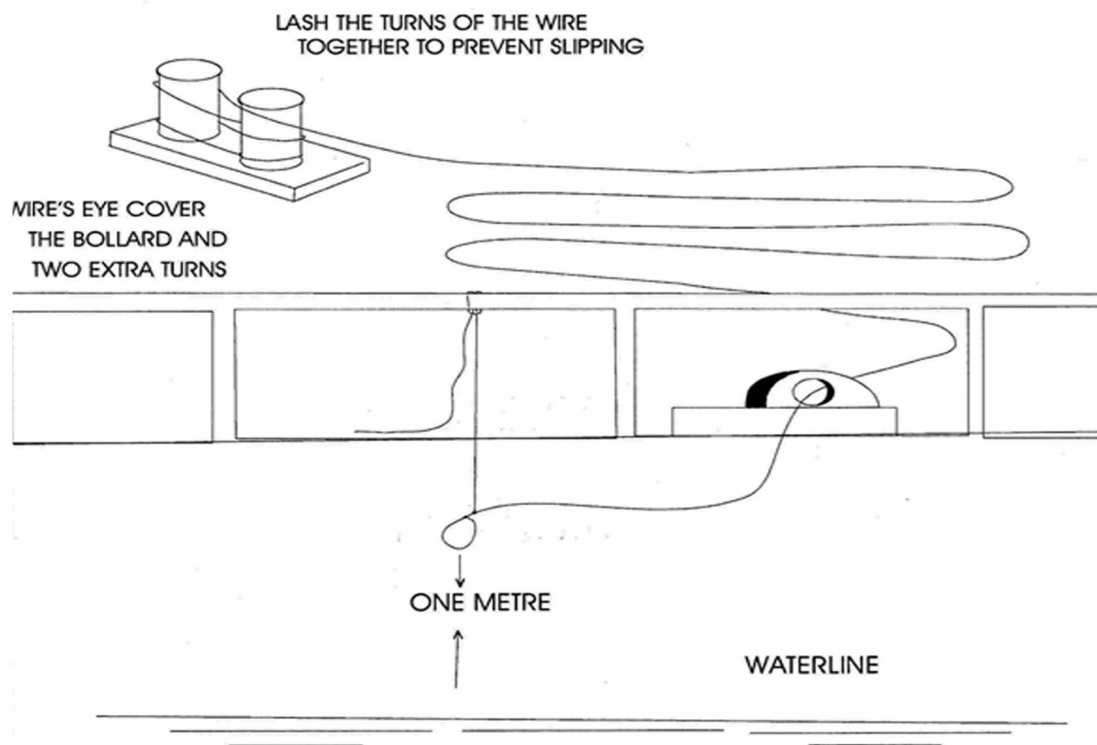

Fire wire ropes shall be provided in accordance with OCIMF as follows :

| Item | Number | Specification | Remarks |
|----------------|--------|--|-----------------------|
| Fire wire rope | 2 | 38 mm dia x 60 m, Galvanized wire rope (6 strands x 36 wires, IWRC) | Stowed on the reel |
| Reel for fire | 1 | Air motor driven | On aft upper deck |
| wire | 1 | Air motor driven | On forward upper deck |

The air motors for the pump room davit and the sludge handling davit shall be commonly used for the fire wire reels.